

EQUIPMENT AND ACCESSORIES



SHUNTS

SEPARATE SHUNTS

Separate shunts increase DC current ratings when connected with the meter with a moving coil. Connection wires with 0.035Ω resistance are enclosed to the shunt. Dimensions comply with DIN 43703. The accuracy class is 0.5.




AR 0101

RATED CURRENT (A)/60mV	MASS (kg)
1, 1.5	0.18
2.5, 4, 6, 10, 15, 25	0.20
40, 60, 100, 150	0.14
250	0.55
400	0.80
600	0.84
1000	1.50
1500	2
2500	3

Other ratings and voltage drops are available on request.
Dimensional drawings on page 149.

SHUNTS FOR ADD-ON

Dimensions of shunts are adapted to meters connection contacts and can be easily fixed on them with M4 screws. The basic meter is provided with the measuring system 5 mA and measures voltage drop 60 mV. Only a corresponding scale has to be inserted. The shunts can be used on the housings 96x96 mm and 72x72 mm, and BN 0103 and BN 0203 meters. The accuracy class is 0.5.

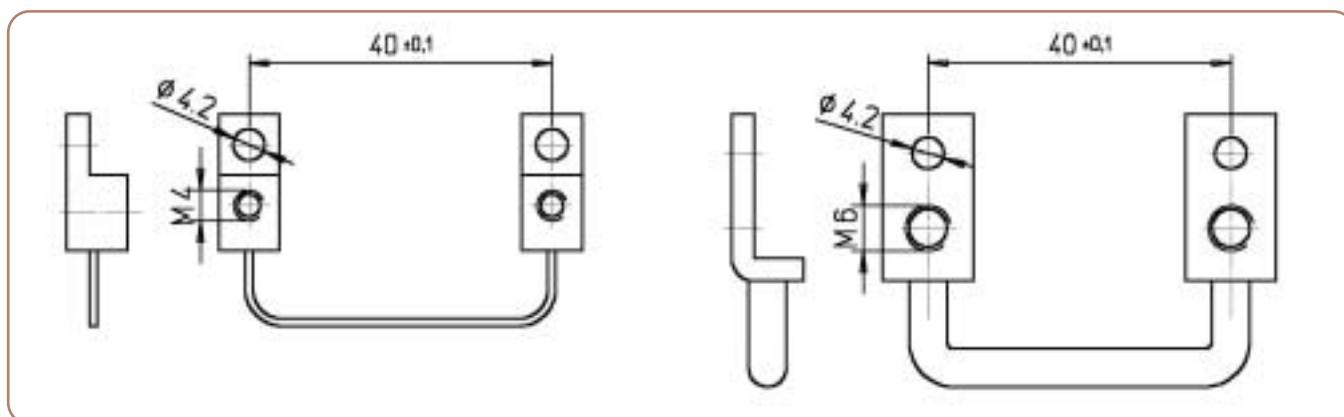

AR 0105

RATED CURRENT (A)/60mV
1, 1.5, 2, 2.5, 4, 5, 6, 8, 10, 15, 20
25, 30, 40, 50, 60